
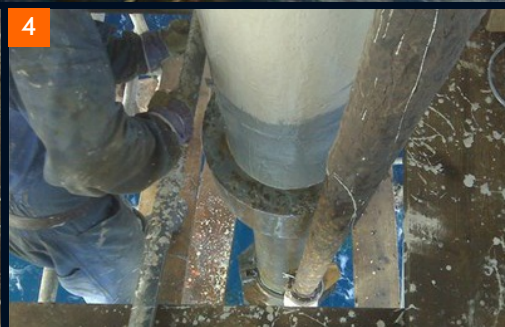


BELZONA PROTECTS RISER IN SPLASH ZONE

ID: 1242

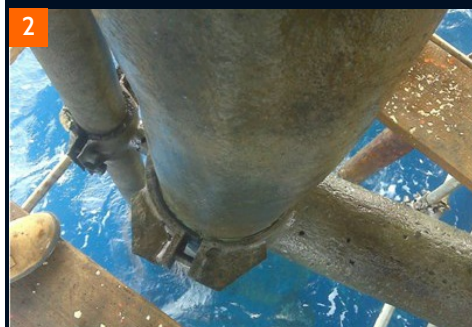

PROBLEM

Corrosion on splash zone

APPLICATION SITUATION

Riser splash zone from the rubber boot to approximately 3.0m above the water

APPLICATION METHOD

The application was carried out in accordance with Belzona Know-How System Leaflet SOS-21. Surface preparation by grit-blasting (garnet) followed by two coats of Belzona® 5831 applied to the area.

BELZONA FACTS

Belzona system was chosen for its ease of application and Belzona® 5831 specifically for its surface tolerance and ability to cure in wet conditions.

INDUSTRY

Oil & Gas

LOCATION

Offshore Platform, Adriatic Sea

APPLICATION DATE

August 2008

PRODUCTS

Belzona 5831 (ST Barrier)

SUBSTRATE

Wet Carbon Steel

PHOTOS

1. Surface preparation by grit- blasting
2. Washed application area following blasting
3. Applying first coat of Belzona 5831
4. Applying second coat of Belzona 5831

For more examples of Belzona Know-How in Action, please visit khia.belzona.com

Belzona products are manufactured under an ISO 9001 Registered Quality Management System.

www.belzona.com

