


BELZONA ALLOWS LUMBER TRANSFER ROLLS TO MAINTAIN POSITIVE TRACTION

ID: 285

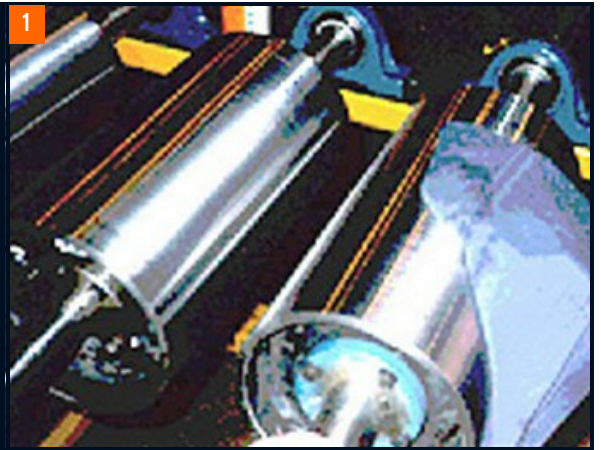

PROBLEM

Saw mill rolls having problems firing the lumber in the correct direction creating short cuts, and crossover jams.

APPLICATION SITUATION

Lumber transfer rolls with insufficient positive traction

APPLICATION METHOD

The application was carried out in accordance with a modified version of Belzona Know-How System Leaflet SHM-12.

BELZONA FACTS

After the correct thickness of Belzona® 1321 (Ceramic S-Metal) is applied, the aggregate is sprinkled into the roller and tamped down before cure. Usually the Belzona application lasts 3-5 years depending on the type of lumber and standard mill operating practices.

INDUSTRY

Pulp & Paper

LOCATION

Lumber Mill in Canada

APPLICATION DATE

October 1999

PRODUCTS

Belzona 1321 (Ceramic S-Metal)

Belzona 9211 (Supergrip Aggregate)

SUBSTRATE

Mild steel

PHOTOS

1. The equipment prior to the application
2. Belzona 1321 is being applied
3. Belzona 9211 is being broadcast onto the roller surface
4. The aggregate is being tamped

For more examples of Belzona Know-How in Action, please visit khia.belzona.com

Belzona products are manufactured under an ISO 9001 Registered Quality Management System.

www.belzona.com

