


BELZONA PROVIDES HIGH TEMPERATURE CORROSION PROTECTION IN VESSEL

ID: 4046

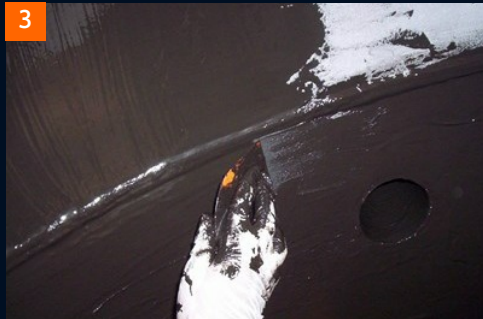

PROBLEM

Internal lining required for vessel processing high temperature hydrocarbons and water

APPLICATION SITUATION

High temperature vessel lining

APPLICATION METHOD

This application was carried out in accordance with TCC-3. After surface preparation by grit blasting the two coats of Belzona 1591 were applied.

BELZONA FACTS

Belzona 1591 (Ceramic XHT Metal) is suitable in immersed applications up to 180 degrees Celsius.

INDUSTRY

Oil & Gas

LOCATION

Egypt

APPLICATION DATE

2004

PRODUCTS

Belzona 1591 (Ceramic XHT Metal)

SUBSTRATE

Steel

PHOTOS

1. Corroded surface
2. Surface after preparation
3. Application process
4. Completed application

For more examples of Belzona Know-How in Action, please visit khia.belzona.com

Belzona products are manufactured under an ISO 9001 Registered Quality Management System.

www.belzona.com

