


ONE DAY TURNAROUND FOR BELZONA FLOOR REPAIR AT IRON ORE MINE

ID: 9382

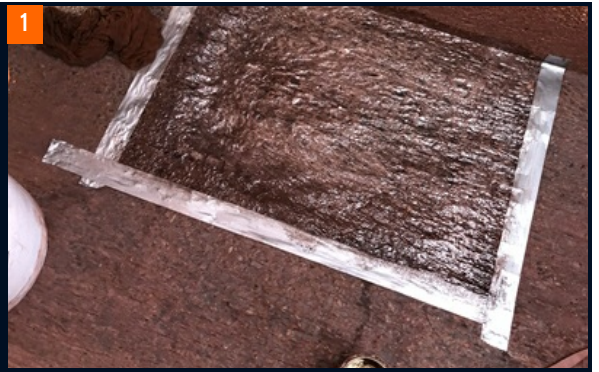

PROBLEM

The customer was experiencing severe erosion on the floor area of a launder. This area was used for the transfer of water and slurry to the thickener dams where it is disposed of. The customer was unable to use the alternative which, in this case, was concrete as this meant the launders would be out of service for 28 days.

APPLICATION SITUATION

The application area itself was 45 metres long and 1 metre wide, with a total thickness of 6-12 mm. The area in the middle was worn more than on the sides.

APPLICATION METHOD

Surface preparation was carried out by hand as the substrate was concrete with blue stone in it. Belzona 4911 (Magma TX Conditioner) was first applied to the area, and then Belzona 4131 (Magma-Screed) one metre at a time. Distributor's own application team carried it the application on site.

BELZONA FACTS

The Belzona 4000 series was offered as the solution as these products had the ability to withstand the harsh erosion and abrasion caused by the volume of water mixed with iron ore particles. In addition, the Belzona 4000 series was simple to apply in the conditions at the mine with the ability to carry out the applications in small sections during the one-day shutdown period.

These initial repairs have been in service for 4-6 years and they show no signs of wear.

INDUSTRY

Mining & Quarrying

LOCATION

Iron ore mine in South Africa

APPLICATION DATE

January 2019

PRODUCTS

Belzona 4131 (Magma-Screed)

Belzona 4911 (Magma TX Conditioner)

SUBSTRATE

Concrete

PHOTOS

1. Smaller are prepared ready for Belzona application
2. Belzona 4131 applied to damaged area.
3. Application in progress
4. Completed repair with Belzona 4131 in service for 5 years

For more examples of Belzona Know-How in Action, please visit khia.belzona.com

Belzona products are manufactured under an ISO 9001 Registered Quality Management System.

www.belzona.com

