


# BELZONA SECURES "A" BRACKETS TO YACHT HULL

ID: 368

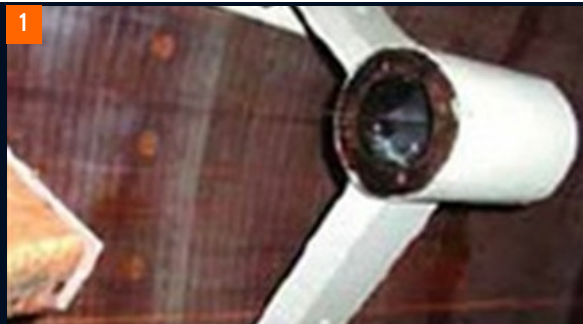

## PROBLEM

Irregular shim required to ensure long term, stress-free attachment to curved GRP clad surface. Underlying hull is timber and steel.

## APPLICATION SITUATION

Propeller shaft "A" bracket supports

## APPLICATION METHOD

Application was carried out in accordance with Belzona Know-How System Leaflet GSS-9.

## BELZONA FACTS

The Belzona provides a high-strength irregular shim under "A" brackets ensuring no stress points on the hull. Non-slump properties of the Belzona important as gaps to be filled ranged from 3 to 25mm (1/8" to 1")

## INDUSTRY

Marine

## LOCATION

Luxury Yacht Builder in UK

## APPLICATION DATE

September 2000

## PRODUCTS

Belzona 1121 (Super XL-Metal)

## SUBSTRATE

GRP and steel

## PHOTOS

1. Bracket positioned using aligning wire and jacking bolts
2. Belzona 1121 being injected between hull and bracket
3. Completed application

For more examples of Belzona Know-How in Action, please visit [khia.belzona.com](http://khia.belzona.com)

Belzona products are manufactured under an ISO 9001 Registered Quality Management System.

[www.belzona.com](http://www.belzona.com)

