


BELZONA EXTENDS THE LIFE OF A SEAWATER PIPE

ID: 6378

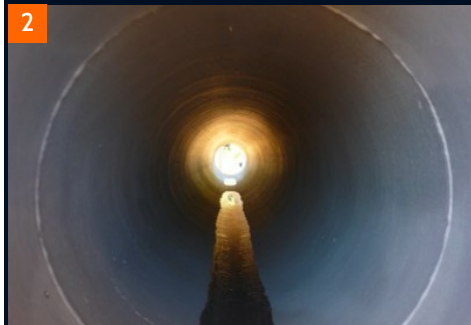

PROBLEM

Seawater at high velocity is causing premature failure of carbon steel piping. The ingrained salts in the flow are erosive as well as corrosive. Some electrolysis is also present and isolation is required to reduce it.

APPLICATION SITUATION

Interior of a seawater piping at an oil producing facility. They were one of the first companies to embrace the new technology of Belzona 1331.

APPLICATION METHOD

These 12" sections of pipe were internally lined by brush and roller due to spin-spray equipment not available. Belzona 1331 was installed in four thin coats with the pipe orientation changing four times.

BELZONA FACTS

Due to the rising cost of quality steel and fabrication lead time, Belzona 1331 was chosen to extend the life of the pipe sections. A longer replacement interval saves the Customer valuable downtime and money.

INDUSTRY

Oil & Gas

LOCATION

Gulf of Mexico, USA

APPLICATION DATE

November 2016

PRODUCTS

Belzona 1331

SUBSTRATE

Carbon Steel

PHOTOS

1. Pipes after abrasive blasting.
2. Surfaces are degreased prior to application.
3. Belzona 1331 internal lining.
4. Complete application.

For more examples of Belzona Know-How in Action, please visit khia.belzona.com

Belzona products are manufactured under an ISO 9001 Registered Quality Management System.

www.belzona.com

